

Electro-mechanical digital voltage stabilisers



Sirius



three-phase
60-6000kVA

Standard features

Voltage stabilisation	Independent phase control
Output voltage selectable via display, PC and/or Ethernet*	from 210 to 255V (L-N) from 360 to 440V (L-L)
Frequency	50/60Hz ±5%
Admitted load variation	Up to 100%
Admitted load imbalance	100%
Cooling	Natural air ventilation. Up to 35°C aided with fans
Ambient temperature	-25/+45°C
Storage temperature	-25/+60°C
Max relative humidity	95%
Admitted overload	200% 2 min.
Harmonic distortion	None introduced
Colour	RAL 7035
Protection degree	IP21
Instrumentation	– Input & output digital multimeter with RS485 port – LCD display
Installation	Indoor
Regulator overload protection	Digital control
Communication system	Ethernet / GPRS / USB / MODBUS TCP/IP
Oversupply protection	– Class I input surge arrester – Class II output surge arrester – Optimal voltage return through supercapacitors – in case of blackout

* The output voltage can be adjusted by choosing **one** of the indicated values.
Such choice sets the new nominal value as a reference for all the stabiliser parameters.

Accessories



Interrupting devices
Load protection against over/undervoltage
Manual by-pass line
Total protection kit
Input isolating transformer
Integrated automatic power factor correction system
EMI/RFI filters
Neutral point reactor
IP54 protection degree for indoor and outdoor installation



Sirius

three-phase 60-6000kVA

Rating in relation to the input variation percentage

±10%	±15%	±20%	±25%	±30%	+15%/-35%	+15%/-45%
200	125	100	80	60	80	60
250	160	125	100	80	100	80
320	200	160	125	100	125	100
400	250	200	160	125	160	125
500	320	250	200	160	200	160
630	400	320	250	200	250	200
800	500	400	320	250	320	250
1000	630	500	400	320	400	320
1250	800	630	500	400	500	400
1600	1000	800	630	500	630	500
2000	1250	1000	800	630	800	630
2500	1600	1250	1000	800	1000	800
3200	2000	1600	1250	1000	1250	1000
4000	2500	2000	1600	1250	1600	1250
5000	3200	2500	2000	1600	2000	1600
6000	4000	3200	2500	2000	2500	2000

Sirius stabilisers are available for different ranges of input voltage fluctuation. In the ±15% / ±20% and ±25% / ±30% types, the change of input range is obtained through different internal connections (only up to 2000kVA ±15% and equivalent).

Sirius stabilisers are equipped with **columnar voltage regulators** which enable the achievement of **high ratings** (up to 6000kVA) and a **solid and reliable construction**, thus **meeting the most diverse industrial applications**.

The Sirius voltage stabilisers regulate the output voltage **independently on each phase**. Similarly to the other models, they can supply **any single-phase, bi-phase and three-phase load** even in case of and up to **100% unbalanced load current** and asymmetrical mains distribution.

In any case, the presence of the **neutral wire is required**. The stabiliser can also operate without neutral wire by adding a device able to generate it (D/zn or D/yn isolating transformer or neutral point reactor).

The stabilisers are cooled via **natural air ventilation**, assisted by extracting fans when the cabinet internal temperature exceeds 35°C.

The instrumentation consists of **two multi-task digital line analysers** (fitted with RS485 port) able to provide with information regarding the status of the lines upstream and downstream the voltage stabiliser (phase and linked voltages, current, power factor, active power, apparent power, reactive power, etc.)

The operating status of the stabiliser can be **monitored** by means of the **LEDs** on the front panel displaying all the **information** regarding each phase operating mode ('power on'; reaching of voltage regulation limits; increase/decrease of voltage regulation) and the possible **alarms** (minimum and maximum voltage, maximum current: overtemperature; ventilation failure). The alarm indicators are accompanied by an acoustic alarm.

Monitoring activities can be **run remotely** by installing the **STABIMON software** provided with the unit on a PC (connected to the stabiliser via Ethernet or a GPRS modem). The readings are **stored** locally **by the control system** and **sent** via the **Internet** (if an Ethernet or GPRS modem connection is established) to a server at maintenance HQ, thus providing the Service centre with the necessary information.

It is also possible to communicate with the stabiliser with the **Modbus TCP/IP** protocol (standard communication protocol between electronic industrial equipment) via an Ethernet connection with RJ45 cable.

The control system is also provided with two **USB ports** for downloading stored data and uploading new releases of the control card software.

The Sirius stabiliser is provided with an **electronic voltage regulator protection system** activates in case of overload on the voltage regulator. In such condition the load supply is not interrupted, but the stabiliser output voltage is automatically set to the lower between the mains voltage and the pre-set



Sirius

three-phase

60-6000kVA



output voltage. The **service continuity is guaranteed**, although the voltage is not stabilised. When the overload condition ceases to exist, the stabiliser switches automatically back to regular functioning. The control logic is managed by two **DSP microprocessors** (one performing the control and the other one managing the measurements) which obtain the output voltage stabilisation by adjusting its **true RMS** value. The whole system is **supervised** by a third 'bodyguard' microprocessor that controls the correct functioning of the other microprocessors.

The unit parameters and reference output voltage value can be **set** via a **PC** connection, allowing for promptly dealing in the field with any issues concerning voltage stability.

The output voltage is reset to the minimum value in case of blackout by means of supercapacitor banks in order to ensure the correct shutdown.

All Sirius stabilisers are provided with Class I and Class II **SPD surge arrestors**.

Remote communication with the stabiliser

The all-in-one control card manages also the remote **communication** to the voltage stabiliser. The card is fitted with a **local display** (showing alarms and setting parameters) and with a keypad used to interact with the card itself.

The **remote data monitoring system** enables the user and our Service Centre the chance of monitoring the stabiliser on-line wherever installed by means of the **STABIMON** dedicated software, supplied with each unit.

Alternatively, the communication with the stabiliser can be established via the **Modbus TCP/IP** protocol. Should the Ethernet connection not be available, the remote communication can be performed via an embedded GPRS modem. A common SIM data card purchased locally and inserted in the modem allows for a simple data transmission.



STABIMON software

STABIMON is the software managing the communication with the voltage stabiliser. The program can be run when the user wishes to communicate with the stabiliser or simply read the collected information.

In a single page, a dashboard provides with the main information concerning voltage, current, power and alarm status.

On the left-hand side of the page, each phase input voltage, current and cosphi are shown, while on the right-hand side, the corresponding output parameters are shown.

In the central area between input and output parameters, mains frequency and general information for the stabiliser identification are displayed.

The lower part of the screen is used to visualise communication errors (if any), input and output active, reactive and apparent powers, voltages and temperature measured on the base board.

The LED status as available on the stabiliser control panel is also reproduced (the LEDs are red in case of error).

Graphs and statistics relevant to the stabiliser operating status can also be displayed.



Wide range

- symmetrical: **±10%, ±15%, ±20%, ±25%, ±30%** (other on request)
- asymmetrical: **+15%/-35%, +15%/-45%** (other on request)

Output voltage accuracy: **±0.5%**.



Technology

Control and stabilisation, performed on the **true RMS** value, are based on two **two-way DSP-microprocessor** operating with a software specifically developed, and under the supervision provided by a third **microprocessor (bodyguard)**.

Parameters and reference voltage can be **set** via a **PC**, thus allowing for solving any problems related to voltage stability directly in the field.

Independent regulation on each phase.

Sirius

three-phase

60-6000kVA



Long life

System voltage regulator with **rollers** (without brushes, which are subject to heavy wear & tear). **Columnar voltage regulator** make possible to achieve **high ratings** (up to 6000kVA) and a solid and reliable construction



Protection

The stabiliser is provided of an **electronic** voltage regulator **protection system** activates in case of overload on the voltage regulator. In such conditions, the **load supply is not interrupted**. The auxiliary circuit is protected by **fuses**.



Protection

Overvoltage protection:
– Class I input **surge arrester**.
– Class II output **surge arrester**.



Protection

Output voltage reset to the minimum value in case of blackout by means of **supercapacitors** banks in order to ensure the correct shutdown.



Instrumentation

Two **multi-task digital analyser** mounted on the front panel and fitted with RS485 port (linked and phase voltage current, frequency, power factor, active power, reactive power, apparent power etc.).



Monitoring

The local **display** embedded in the front panel enables the visualization of **operating mode** and setting data.



Monitoring

The stabiliser **operating mode** can be easily **monitored** by means of the **LEDs** on the front panel, which provide with **information** and **alarms**.



Monitoring

Monitoring activities can be run remotely by installing on a PC (connected to the stabiliser via Ethernet) the **STABIMON software** provided with the unit. It is also possible to communicate with the stabiliser with the **Modbus TCP/IP** protocol.



Monitoring


The control system is able to interface with the **Internet** thanks to its capability to connect with **Ethernet** and **Gprs** protocols. This allows for a remote monitoring of the equipment, thus guaranteeing **prompt assistance** worldwide.

Sirius
three-phase
60-6000kVA

Type	Input voltage variation range	Rating	Input voltage range	Maximum input current	Output voltage ±0.5%	Output current	Efficiency	Speed regulation	Cabinet	Weight
	[%]	[kVA]	[V]	[A]	[V]	[A]	[%]	[ms/V]	Type	[kg]

Input voltage variation range **±10%** (the values listed in the table are referred to 400V nominal voltage)

200-10	±10	200	360-440	321	400	289	>98	30	54	650
250-10	±10	250	360-440	401	400	361	>98	30	54	670
320-10	±10	320	360-440	514	400	462	>98	30	55	900
400-10	±10	400	360-440	642	400	578	>98	30	55	950
500-10	±10	500	360-440	803	400	723	>98	30	55	1050
630-10	±10	630	360-440	1011	400	910	>98	30	55	1300
800-10	±10	800	360-440	1284	400	1156	>98	30	53	1400
1000-10	±10	1000	360-440	1606	400	1445	>98	30	62	1700
1250-10	±10	1250	360-440	2007	400	1806	>98	36	62	2200
1600-10	±10	1600	360-440	2569	400	2312	>98	36	63	2400
2000-10	±10	2000	360-440	3211	400	2890	>98	36	64	3000
2500-10	±10	2500	360-440	4014	400	3613	>98	36	70	4000
3200-10	±10	3200	360-440	5138	400	4624	>98	36	70	4300
4000-10	±10	4000	360-440	6422	400	5780	>98	45	80	6000
5000-10	±10	5000	360-440	8028	400	7225	>98	45	80	7300
6000-10	±10	6000	360-440	9634	400	8671	>98	54	90	11000

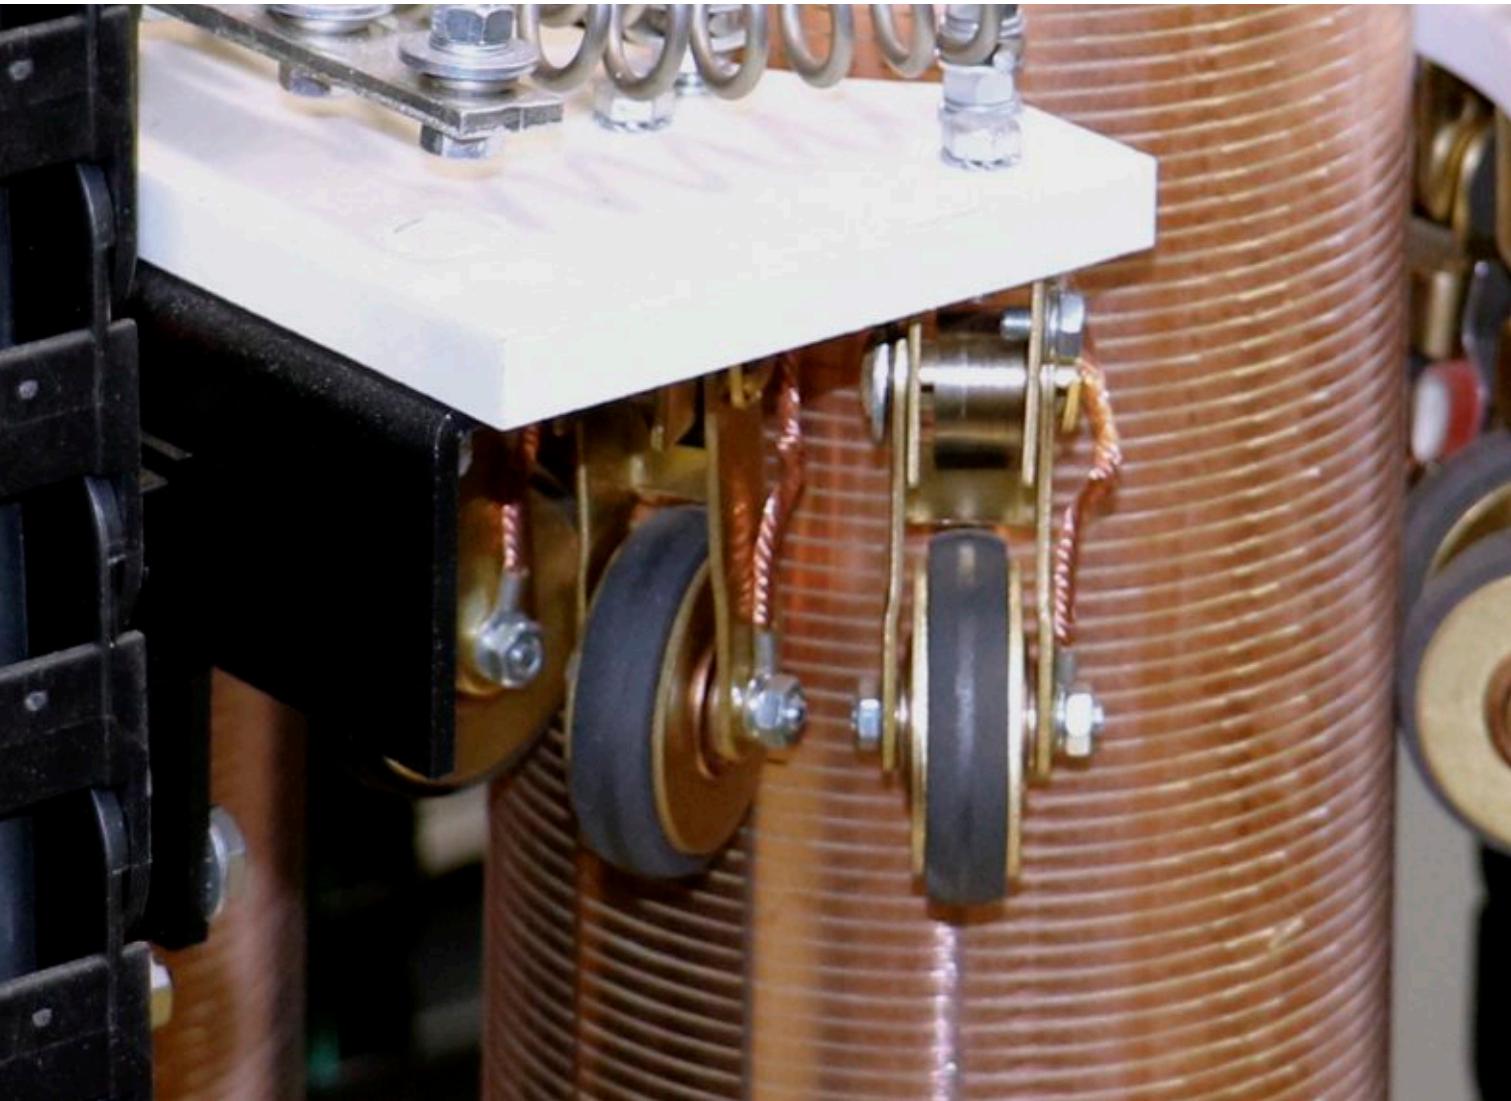

Sirius
three-phase
60-6000kVA

Type	Input voltage variation range	Rating	Input voltage range	Maximum input current	Output voltage ±0.5%	Output current	Efficiency	Speed regulation	Cabinet	Weight
	[%]	[kVA]	[V]	[A]	[V]	[A]	[%]	[ms/V]	Type	[kg]

Input voltage variation range **±20%/±15%** (the values listed in the table are referred to 400V nominal voltage)

100-20	±20	100	320-480	180	400	144	>98	15	54	650
125-15	±15	125	340-460	213		181		20		
125-20	±20	125	320-480	226	400	181	>98	15	54	670
160-15	±15	160	340-460	272		231		20		
160-20	±20	160	320-480	289	400	231	>98	15	55	900
200-15	±15	200	340-460	340		289		20		
200-20	±20	200	320-480	361	400	289	>98	15	55	950
250-15	±15	250	340-460	425		361		20		
250-20	±20	250	320-480	452	400	361	>98	15	55	1050
320-15	±15	320	340-460	544		462		20		
320-20	±20	320	320-480	578	400	462	>98	15	55	1300
400-15	±15	400	340-460	680		578		20		
400-20	±20	400	320-480	722	400	578	>98	15	53	1400
500-15	±15	500	340-460	851		723		20		
500-20	±20	500	320-480	903	400	723	>98	15	62	1700
630-15	±15	630	340-460	1071		910		20		
630-20	±20	630	320-480	1138	400	910	>98	18	62	2200
800-15	±15	800	340-460	1360		1156		24		
800-20	±20	800	320-480	1445	400	1156	>98	18	63	2400
1000-15	±15	1000	340-460	1700		1445		24		
1000-20	±20	1000	320-480	1806	400	1445	>98	18	64	3000
1250-15	±15	1250	340-460	2125		1806		24		
1250-20	±20	1250	320-480	2258	400	1806	>98	18	70	4000
1600-15	±15	1600	340-460	2720		2312		24		
1600-20	±20	1600	320-480	2890	400	2312	>98	18	70	4300
2000-15	±15	2000	340-460	3400		2890		24		
2000-20	±20	2000	320-480	3613	400	2890	>98	22	80	6000
2500-15	±15	2500	340-460	4251	400	3613	>98	30	80	6000
2500-20	±20	2500	320-480	4516	400	3613	>98	22	80	7300
3200-15	±15	3200	340-460	5440	400	4624	>98	30	80	7300
3200-20	±20	3200	320-480	5780	400	4624	>98	27	90	11000
4000-15	±15	4000	340-460	6800	400	5780	>98	36	90	11000

Sirius
three-phase
60-6000kVA

Type	Input voltage variation range	Rating	Input voltage range	Maximum input current	Output voltage ±0.5%	Output current	Efficiency	Speed regulation	Cabinet	Weight
	[%]	[kVA]	[V]	[A]	[V]	[A]	[%]	[ms/V]	Type	[kg]

Input voltage variation range **±30%/±25%** (the values listed in the table are referred to 400V nominal voltage)

60-30	±30	60	280-520	124	400	87	>98	10	54	650
80-25	±25	80	300-500	154		116		12		
80-30	±30	80	280-520	165	400	116	>98	10	54	670
100-25	±25	100	300-500	193		144		12		
100-30	±30	100	280-520	206	400	144	>98	10	55	900
125-25	±25	125	300-500	241		181		12		
125-30	±30	125	280-520	258	400	181	>98	10	55	950
160-25	±25	160	300-500	308		231		12		
160-30	±30	160	280-520	330	400	231	>98	10	55	1050
200-25	±25	200	300-500	385		289		12		
200-30	±30	200	280-520	413	400	289	>98	10	55	1300
250-25	±25	250	300-500	482		361		12		
250-30	±30	250	280-520	516	400	361	>98	10	53	1400
320-25	±25	320	300-500	617		462		12		
320-30	±30	320	280-520	661	400	462	>98	10	62	1700
400-25	±25	400	300-500	770		578		12		
400-30	±30	400	280-520	826	400	578	>98	12	62	2200
500-25	±25	500	300-500	963		723		15		
500-30	±30	500	280-520	1032	400	723	>98	12	63	2400
630-25	±25	630	300-500	1214		910		15		
630-30	±30	630	280-520	1300	400	910	>98	12	64	3000
800-25	±25	800	300-500	1541		1156		15		
800-30	±30	800	280-520	1651	400	1156	>98	12	70	4000
1000-25	±25	1000	300-500	1927		1445		15		
1000-30	±30	1000	280-520	2064	400	1445	>98	12	70	4300
1250-25	±25	1250	300-500	2408		1806		15		
1250-30	±30	1250	280-520	2580	400	1806	>98	15	80	6000
1600-25	±25	1600	300-500	3083	400	2312	>98	18	80	6000
1600-30	±30	1600	280-520	3303	400	2312	>98	15	80	7300
2000-25	±25	2000	300-500	3853	400	2890	>98	18	80	7300
2000-30	±30	2000	280-520	4130	400	2892	>98	18	90	11000
2500-25	±25	2500	300-500	4817	400	3613	>98	22	90	11000

Sirius
three-phase
60-6000kVA

Type	Input voltage variation range	Rating	Input voltage range	Maximum input current	Output voltage ±0.5%	Output current	Efficiency	Speed regulation	Cabinet	Weight
	[%]	[kVA]	[V]	[A]	[V]	[A]	[%]	[ms/V]	Type	[kg]

Input voltage variation range **+15%/-35%** (the values listed in the table are referred to 400V nominal voltage)

80-15/35	+15/-35	80	260-460	178	400	116	>98	12	54	770
100-15/35	+15/-35	100	260-460	222	400	144	>98	12	54	800
125-15/35	+15/-35	125	260-460	278	400	181	>98	12	55	1050
160-15/35	+15/-35	160	260-460	356	400	231	>98	12	55	1150
200-15/35	+15/-35	200	260-460	444	400	289	>98	12	55	1250
250-15/35	+15/-35	250	260-460	556	400	361	>98	12	52	1700
320-15/35	+15/-35	320	260-460	711	400	462	>98	12	52	1800
400-15/35	+15/-35	400	260-460	889	400	578	>98	12	63	2100
500-15/35	+15/-35	500	260-460	1111	400	723	>98	15	63	2900
630-15/35	+15/-35	630	260-460	1400	400	910	>98	15	64	3050
800-15/35	+15/-35	800	260-460	1778	400	1156	>98	15	70	3800
1000-15/35	+15/-35	1000	260-460	2223	400	1445	>98	15	70	4450
1250-15/35	+15/-35	1250	260-460	2779	400	1806	>98	15	72	4800
1600-15/35	+15/-35	1600	260-460	3557	400	2312	>98	18	82	7700
2000-15/35	+15/-35	2000	260-460	4446	400	2890	>98	18	82	9050
2500-15/35	+15/-35	2500	260-460	5558	400	3613	>98	22	92	13500

Input voltage variation range **+15%/-45%** (the values listed in the table are referred to 400V nominal voltage)

60-15/45	+15/-45	60	220-460	158	400	87	>98	10	54	850
80-15/45	+15/-45	80	220-460	211	400	116	>98	10	54	900
100-15/45	+15/-45	100	220-460	262	400	144	>98	10	55	1200
125-15/45	+15/-45	125	220-460	329	400	181	>98	10	55	1250
160-15/45	+15/-45	160	220-460	420	400	231	>98	10	55	1400
200-15/45	+15/-45	200	220-460	525	400	289	>98	10	52	1900
250-15/45	+15/-45	250	220-460	656	400	361	>98	10	52	2000
320-15/45	+15/-45	320	220-460	840	400	462	>98	10	63	2300
400-15/45	+15/-45	400	220-460	1051	400	578	>98	12	63	3200
500-15/45	+15/-45	500	220-460	1315	400	723	>98	12	64	3400
630-15/45	+15/-45	630	220-460	1655	400	910	>98	12	70	4200
800-15/45	+15/-45	800	220-460	2102	400	1156	>98	12	70	4900
1000-15/45	+15/-45	1000	220-460	2627	400	1445	>98	12	72	5300
1250-15/45	+15/-45	1250	220-460	3284	400	1806	>98	15	82	8700
1600-15/45	+15/-45	1600	220-460	4204	400	2312	>98	15	82	10100
2000-15/45	+15/-45	2000	220-460	5254	400	2890	>98	18	92	15000